



1000

FL



80 - 140 HP




4

SERIE FL										
	mm. A	mm. B	inches A	inches B	KG.	LBS	N.	N.	N.	HP
FL 3000	3115	3290	122,64	129,53	1200	2646	60	72	104	80 - 140

I * I pesi sono senza slitte, senza rullo posteriore. **F** * Les poids sont sans patins, sans rouleau arrière. **GB** * Weights do not include skids, rear roller.
D * Gewichte sind ohne Kufen, ohne hintere Walze. **E** * Los pesos indicados no incluyen patinas y rodillo trasero. **PVC** * Вес без лыж, без заднего ролика.

Mod. MZ 822 F

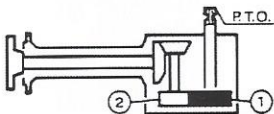

1000

* **I** Velocità inserita * **D** Seriendrehung
 * **F** Vitesse branchée * **E** Velocidad engranada
 * **GB** Plugged speed * **PVC** Скорость стандартная

I A richiesta **D** Auf Wunsch
F Sur demande **E** A pedido
GB On request **PVC** По запросу

● 24

● 27

● 26

● 21

○ 37

○ 34

○ 35

○ 40

268 *

329

307

217



I Dischi anteriori (foto 5). Ripuntatore rompitraccia frontale (foto 6).

F Disques antérieurs (photo 5). Effaceur de trace frontal (photo 6).

GB Front discs (photo 5). Front adjustable trace breaker (photo 6).

D Vordere Zuführscheiben (Foto 5). Spurlockerer (Foto 6).

E Discos anteriores (foto 5). Borrachueñas frontal (foto 6).


I In tutte le macchine il rotore a zappe (foto 7) è intercambiabile con rotore a denti **ROKING** (foto 4) o con rotore a coltelli diritti **TERRAKING** (foto 6).

F Sur toutes les machines le rotor à houes (photo 7) est interchangeable avec un rotor à dents **ROKING** (photo 4) ou avec un rotor à couteaux droits **TERRAKING** (photo 6)

GB On all the machines hoes rotors (photo 7) are interchangeable with the tines rotors **ROKING** (photo 4) or with the straight blades rotors **TERRAKING** (photo 6)


D Bei allen Maschinen sind die Rotoren mit Winkelmessern (foto 7) austauschbar gegen Zinkenrotoren **ROKING** (foto 4) und Rotoren mit geraden Messern **TERRAKING** (foto 6)

E En todas las máquinas los rotores con azadas (foto 7) son intercambiables con rotores con dientes **ROKING** (foto 4) o con rotores con cuchillos rectos **TERRAKING** (foto 6)

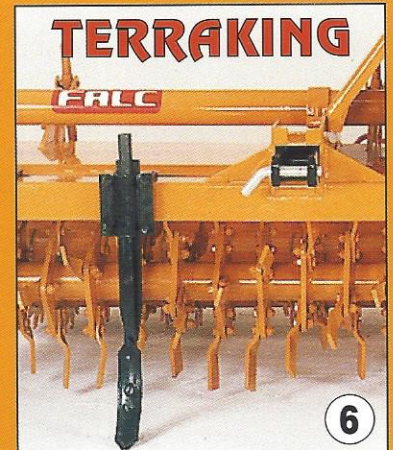

TERRAKING

FALC

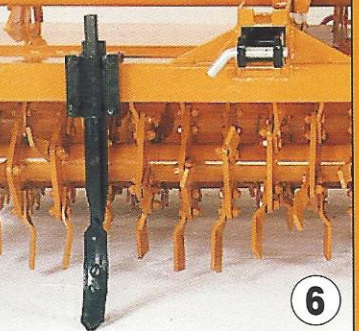

6

PVC На всех машинах анкерный ротор (фото 7) заменяемый на зубчатый ротор **ROKING** (фото 4) или на ротор с долотами